


4/8/02
[Signature]

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

[Signature: J. Evans]


Dated 3 September 2001

CERTIFIED COPY OF
PRIORITY DOCUMENT

THIS PAGE BLANK (USPTO)



**Statement of inventorship and
of right to grant of a patent**

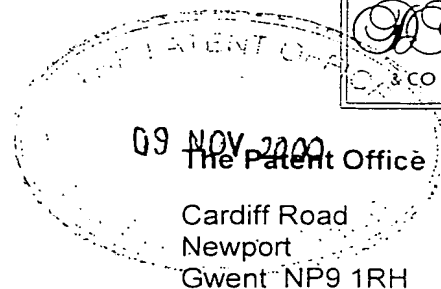

1. Your reference P009892GB

2. Patent application number (if you know it) **0027423.3** - 9 NOV 2000

3. Full name of the or of each applicant SONY UNITED KINGDOM LIMITED

4. Title of the invention RECEIVER

5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent BY VIRTUE OF AN ASSIGNMENT DATED 8 NOVEMBER 2000 BETWEEN OURSELVES AND THE OVERNAMED INVENTORS

6. How many, if any, additional Patents Forms 7/77 are attached to this form? (see note (c))

7. I/We believe that the person(s) named over the page (and on any extra copies of this forms) is/are the inventor(s) of the invention which the above patent relates to.

Signature Date

D Young & Co

D YOUNG & CO 8 Nov 2000
Agents for the Applicants

8. Name and daytime telephone number of person to contact in the United Kingdom 023 8071 9500 Dr Jonathan DeVile

Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

b) Write answers in capital letters using black ink or you may type them.

c) If there are more than three inventor, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.

d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.

e) Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames


Surname	<u>WILSON</u>
First Names	JOHN
Address	4 QUINCE TREE WAY HOOK HAMPSHIRE RG27 9SG
Patents ADP number (if you know it): 5019499001	

Surname	<u>ATUNGSIRI</u>
First Names	SAMUEL
Address	13 SIMMONS WALK BASINGSTOKE HAMPSHIRE RG21 4BS
Patents ADP number (if you know it): 80091507001	

08034324001

Surname	
First Names	
Address	
Patents ADP number (if you know it):	

Reminder:
Have you signed the form?

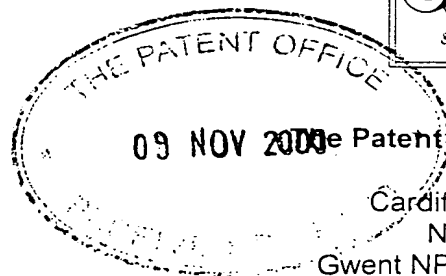

Request for a grant of a patent

(See the notes on the back of this form you can also get an explanatory leaflet from the Patent Office to help you fill in this form)

Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference P009892GB

10NOV00 E582650-1 002246
F01/7700 0.01-0027423.3

2. Patent application number
(The Patent Office will fill in this part)

0027423.3

- 9 NOV 2000

3. Full name, address and postcode of the
or of each applicant
(underline all surnames)

SONY UNITED KINGDOM LIMITED
THE HEIGHTS
BROOKLANDS
WEYBRIDGE
SURREY
KT13 0XW

Patents ADP number (if you know it)

If the applicant is a corporate body, give
the country/state of its incorporation

UNITED KINGDOM

6522700003

4. Title of the invention

RECEIVER

5. Name of your agent (if you have one)

D YOUNG & CO

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

21 NEW FETTER LANE
LONDON
EC4A 1DA

Patents ADP number (if you know it)

59006

6. If you are declaring priority from
one or more earlier patent
applications, give the country and
date of filing of the or each of these
earlier applications and (if you know
it) the or each application number

Country

Priority application
number
(if you know it)

Date of filing
(day/month/year)

1st

2nd

3rd


7. If this application is divided or otherwise
derived from an earlier UK application,
give the number and filing date of the
earlier application

Number of earlier
application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d))

YES

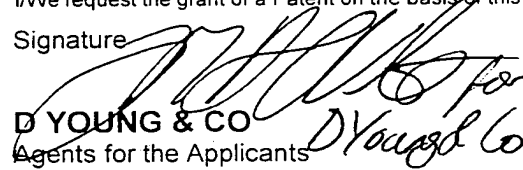9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document	Continuation sheets of this form	0	
	Description	21	/
	Claim(s)	9	/
	Abstract	1	/
	Drawing(s)	7	+7 /
10. If you are also filing any of the following, state how many against each item	Priority Documents	0	
	Translation of Priority Documents	0	
	Statement of inventorship and right to grant of a patent (Patents Form 7/77)	3	/
	Request for preliminary examination and search (Patents Form 9/77)	1	/
	Request for substantive examination (Patents Form 10/77)	0	
	Any other documents (Please specify)	0	
11.	I/We request the grant of a Patent on the basis of this application.		
	Signature	Date	
			8 Nov 2000
	D YOUNG & CO Agents for the Applicants		
12. Name and daytime telephone number of person to contact in the United Kingdom	Dr Jonathan DeVile	023 80719500	

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheets should be attached to this form.
- d) If you answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

RECEIVER

Field of Invention

The present invention relates to receivers operable to detect and recover data from received signal samples. The present invention also relates to methods of detecting and recovering data from received signal samples.

Background of Invention

Generally data is communicated using radio signals by modulating the data onto the radio signals in some way, and transmitting the radio signals to a receiver. At the receiver, the radio signals are detected and the data recovered from the received radio signals. Typically this is performed digitally, so that at the receiver, the detected radio signals are down converted to a base band representation and converted from analogue form to digital form. In the digital form the base band signals are processed to recover the data. However in order to recover the data, the receiver must be synchronised to the received digital signal samples to the effect that the relative temporal position of the recovered data symbols corresponds with the temporal position of the data when transmitted. This is particularly true for radio communications systems in which the data is transmitted as bursts or packets of data.

An example of a radio communications system in which data is communicated in bursts or blocks of data is the Digital Video Broadcasting (DVB) system. The DVB system utilises a modulation scheme known as Coded Orthogonal Frequency Division Multiplexing (COFDM) which can be generally described as providing K narrow band carriers (where K is an integer) and modulating the data in parallel, each carrier communicating a Quadrature Amplitude Modulated (QAM) symbol. Since the data is communicated in parallel on the carriers, the same symbol may be communicated on each carrier for an extended period. Generally, this period is arranged to be greater than a coherence time of the radio channel so that by averaging over the extended period, the data symbol modulated onto each carrier may be recovered in spite of time and frequency selective fading effects which typically occur on radio channels.

To facilitate detection and recovery of the data at the receiver, the QAM data symbols are modulated onto each of the parallel carriers contemporaneously, so that in

combination the modulated carriers form a COFDM symbol. The COFDM symbol therefore comprises a plurality of carriers each of which has been modulated contemporaneously with different QAM data symbols.

In the time domain, each COFDM symbol is separated by a guard period which is formed by repeating data bearing samples of the COFDM symbol. Therefore, at a receiver, to detect and recover the data, the receiver should be synchronised to each COFDM symbol and the data demodulated from the data bearing signal samples of the COFDM symbol. A previously proposed technique for acquiring synchronisation with the data bearing signal samples of a COFDM symbol is to cross correlate two samples which are temporally separated by the period over which the data bearing samples are modulated. A relative temporal position of the two samples is then shifted within the COFDM symbol, until a position is found at which the cross-correlation produces maximum energy.

Although the previously proposed synchronisation technique works adequately in the presence of additive white gaussian noise, in some situations such as where the signal is received in the presence of multi-path propagation, this technique produces a sub-optimum synchronisation point, which can cause the data bearing signal samples to be corrupted with energy from adjacent signal samples. This is known as inter-symbol interference (ISI).

Summary of Invention

According to the present invention there is provided a receiver for detecting and recovering data from at least one set of received signal samples, the signal samples comprising a plurality of data bearing signal samples and a plurality of guard signal samples before or after the data bearing signal samples, the guard signal samples being formed by repeating a plurality of the data bearing signal samples, the receiver comprising a matched filter having an impulse response, a controller operable to adapt the impulse response of the matched filter to the signal samples of the guard signal samples, the matched filter being operable to produce an output signal which is representative of the convolution of the guard signal samples of the set with the set of received signal samples, and a synchronisation detector operable to estimate the location of a sync position, consequent upon the distribution of energy with respect to

time of the filter output signal with respect to the received samples, the sync position providing the position of a window of the received signal samples from which the data may be recovered from the data bearing signal samples.

As will be explained in more detail shortly, a receiver embodying the present invention provides an improvement in detecting and recovering of data from data bearing samples forming a set of received signal samples which include guard signal samples temporally positioned either before or after the data bearing signal samples. The guard signal samples are formed by repeating the data bearing signal samples over a period which is equivalent to the guard interval. By providing the receiver with a filter and a controller which adapts the impulse response of the filter to the signal samples of the guard interval an improved estimate of the sync position is provided. A synchronisation detector may be operable to detect a synchronisation (sync) position in accordance with the distribution of energy with respect to time of the matched filter output response produced as the received signal passes through the filter. The peaks of the filter output signal generally correspond to replicas of the transmitted signal generated by propagation over the radio path. The receiver can therefore derive an improved estimate of the sync position by locating the earliest significant component of the radio channel and locating the window from which data can be recovered from the data bearing signal samples starting from this earliest significant component. This is particularly advantageous in the case of where the received signal is detected in the presence of multi-path propagation.

Although the sync position can be acquired by filtering all the signal samples within the set of received signal samples with the filter, in preferred embodiments the controller may be operable to control the filter to convolve the received signal samples with the filter starting from a coarse estimate of the sync position. Accordingly, the receiver may comprise a correlator operable to correlate two samples from the set of received signal samples separated by a temporal displacement corresponding to the temporal separation of the guard period and the data bearing signal samples from which the guard signal samples have been formed, the correlation between the two samples being determined at each of a plurality of relatively displaced positions, and the synchronisation detector may be operable to determine an output value of the correlator for each of the displaced positions, and to estimate the sync position in

accordance with the displaced position which produces the greatest output from the correlator. A coarse estimate of the sync position is determined at each of a plurality of relatively displaced positions. the synchronisation detector can therefore determine the fine estimate of the sync position more quickly starting from the coarse estimate.

- 5 Thus preferably, the number of positions at which the displaced samples are cross correlated is determined from the number of guard signal samples divided by an integer number.

Although the receiver could be arranged to detect the sync position of only one set of received signal samples, in one application of the receiver according to the
10 present invention, the receiver is operable to process a plurality of sets of received signal samples. Advantageously, therefore the synchronisation detector may be operable to combine the peaks of the output signal from the synchronisation detector for each of a plurality of sets of received signal samples and to estimate the sync position from a peak value of the combined output signal. Effectively therefore the
15 synchronisation detector integrates the output signal over successive sets of received signal samples and therefore provides a more accurate determination of the sync position from a peak value of the combined output signal.

Although the example embodiment of the present invention has been described with reference to Coded Orthogonal Frequency Division Multiplexing (COFDM), it
20 will be appreciated that the present invention is not limited to this modulation scheme, but finds application with any other COFDM variant such as Orthogonal Frequency Division Multiplexing (OFDM) or indeed any other modulation and communication scheme could be used. The present invention finds application with any receiver which is arranged to detect data from a set of received signal samples comprising data
25 bearing signal samples and guard signal samples which are reproduced by replicating the data bearing signal samples.

For some applications, the number of received signal samples in the set of received signal samples may be relatively large. For example, for an application with digital video broadcasting, the COFDM symbols are comprise either 2048 signal
30 samples (2K version) or 8192 signal samples (8K mode). Furthermore the set of received signal samples and the impulse response comprise complex samples having real and imaginary parts. As a result the filter which is required to perform the

convolution of the guard signal samples with the set of received signal samples would be required to have either 1536 taps or 6144 taps, for the 2K and 8K modes respectively, which represents a prohibitive number for implementation and for real time operation. However in preferred embodiments the controller may be operable to
5 represent the real and imaginary components of each of the received signal samples as a positive or negative constant in dependence upon the relative sign of the real and imaginary parts and to logically combine the impulse response with the received signal samples to produce the output signal. As such by representing the impulse response and the received signal samples as the constant for each of the real and imaginary
10 parts, an approximation of the convolution of the received signal samples and the filter impulse response is generated from which the sync position can be determined. Thus the filter is implemented with a considerably reduced complexity.

Various further aspects and features of the present invention are defined in the appended claims.

15 **Brief Description of the Drawings**

One embodiment of the present invention will now be described by way of example only with reference to the accompanying drawings wherein:

Figure 1 is a schematic representation of two successive COFDM symbols;

Figure 2 is a schematic block diagram of a previously proposed
20 synchronisation detector;

Figure 3 is a schematic representation of the two COFDM symbols of figure 1 being received at a receiver via a main path and an echo path;

Figure 4 is a schematic block diagram of a receiver according to an embodiment of the present invention;

25 Figure 5 is a schematic block diagram of a synchronisation detector forming part of the receiver shown in figure 4;

Figure 6 is a schematic representation illustrating the processing of OFDM symbols by a matched filter forming part of the receiver of figure 5;

Figure 7 is a table providing an indication of the meaning of symbols which are
30 used throughout the description and drawings.

Description of Preferred Embodiments

An example embodiment of the present invention will now be described with reference to detecting and recovering data from a COFDM symbol produced for example in accordance with the Digital Video Broadcasting (DVB) standard. The DVB standard is disclosed in a publication by the European telecommunications standards institute number EN300744 version 1.1.2 (1997-08) and entitled "Digital Video Broadcasting (DVB); Frame Structure Channel Coding And Modulation For Digital Terrestrial Television".

As already explained, a COFDM symbol which is modulated in accordance with DVB standard is generated by modulating K narrow band carriers in parallel with the data to be communicated. Generally as disclosed in the above referenced ETSI publication, the COFDM symbols are formed in the frequency domain and then converted in the time domain using an Inverse Fourier Transform. A diagram representing the form of the COFDM symbols is shown in Figure 1. In the following description, symbols which are used to represent various quantities are summarised in a table shown in figure 7.

In Figure 1 two COFDM symbols represented as blocks 1, 2 are shown as they would be transmitted by a DVB transmitter with time progressing from left to right across the page. As shown in Figure 1, each COFDM symbol 1, 2 has a useful part of the symbol during which the data is transmitted. This part of the symbol has duration of T_u seconds and has N_u samples. A guard interval G.1, G.2 of duration T_g seconds separates the current symbol from the previous one. The guard interval has N_g samples. For each symbol 1, 2 the guard interval G.1, G.2 therefore precedes the useful part of the symbol and is formed, as indicated by an arrow 4, by replicating the samples in the last T_g seconds of the useful part of the symbol. Each COFDM symbol of N_s samples therefore has duration $T_s = T_g + T_u$ seconds.

In order to recover the data within the COFDM symbols, the receiver must detect the data bearing signal samples from within the set of received signal samples corresponding to each COFDM symbol. Symbol acquisition entails the location of the optimum point at which the window for FFT processing should start. The FFT forms the core of the COFDM demodulator.

The replicated samples during the guard interval G.1, G.2 can be used to locate the start of each symbol at the receiver. This is what is referred to above as the location of the FFT window since the FFT must be performed over a segment of duration T_u that preferably covers only the useful part of the symbol. However, FFT windows that start elsewhere within the guard interval can also be tolerated. Such FFT windows result in a phase slope at the output of the FFT that can be corrected if the FFT window location is to within T_g seconds before the correct location. If however the window location error is excessive, the resultant phase slope wraps around $\pm\pi/2$ radians and so cannot be resolved and corrected. This results in inter-symbol interference (ISI) which degrades the receiver performance.

Figure 2 provides an illustration of a previously proposed synchronisation detector for detecting the FFT window. Once the FFT window of the data bearing signal samples has been located, the data is recovered from these data bearing signal samples by applying an FFT. The FFT therefore converts the signal samples back into the frequency domain from which the data can be recovered from the K carriers. In Figure 2 the two COFDM symbols 1, 2 are shown to be received by a correlator 10. A delay line 12 is arranged to delay the signal samples of the received symbols 1, 2 by an amount corresponding to the length of the signal samples T_u . The correlator 10 has a first input which receives signal samples from the delay line 12 and a second input which receives contemporaneously signal samples from the set of samples forming the received COFDM symbol. An output of the correlator $c(n)$ is then fed to an adder 18 on a first input. The adder 18 is arranged to receive the output from the correlator on a second input 22 delayed by a delay 24 by a period equal to that of the guard interval. The adder 18 also receives on a third input 26 samples from the output of the adder 18 $a(n)$ fed back via a one sample delay 28. The output from the adder $a(n)$ is then received on a first input of a second adder 30 which also has second and third inputs. The second input receives a version of the output from the first adder $a(n)$ via a delay producing a delay equal to the guard interval 32 and the third input of the second adder 30 receives samples fed back from the output of the second adder via a further one sample delay 34. The output of the second adder $e(n)$ provides a signal from which the FFT window for recovering the data from the COFDM symbols can be determined.

The first adder 18 in combination with the delays 24, 28 effectively form a moving averaging window filter having a length equal to the period of the guard interval. The second adder 30 and the delays 32, 34 form a second moving averaging filter having a window equal to the period of the guard interval. The outputs of the correlator, the first adder and second adder are also shown in Figure 2 plotted with a respect to time in relationship with the time axis of the COFDM symbols 1, 2. As shown the output of the correlator $c(n)$ produces a square pulse which corresponds effectively with the auto-correlation of the guard interval. This is of course in the absence of noise. The output of the first adder $a(n)$ produces an integration of the output of the correlator $c(n)$ and the output $e(n)$ of the second adder 30 produces a further integration of the output of the first moving averaging window. For each symbol, the samples in the guard interval also occur in the last T_g seconds of the symbol. The moving window also has duration of T_g seconds. Equation (1) illustrates the computation of the correlation for each received sample $r(n) = r(nT)$ where T is the sample time of the received sequence at the receiver:

$$\begin{aligned} c(n) &= r(n)r^*(n - N_u) \\ a(n) &= \sum_{k=0}^{N_g-1} c(n - k) \end{aligned} \quad (1)$$

for $n = 0, 1, \dots, N_s-1$ where $r^*(n)$ is the complex conjugate of $r(n)$.

The value of n which produces the maximum of $a(n)$ within a given sequence of N_s received samples therefore provides the optimum coarse sync position. The moving correlation sequence $a(n)$ can be averaged with similar sequences computed over a number of successive N_s length windows in order to improve acquisition performance during low signal to noise ratio (SNR). Furthermore, the correlation sequence $a(n)$ can be also integrated over a window of T_g seconds in order to enhance performance in dispersive or multi-path channels. This integration which can be done prior to the averaging over successive T_g seconds windows is described by the equation (2).

$$e(n) = \sum_{k=0}^{N_g-1} a(n - k) \quad (2)$$

Effectively then a peak of the second moving averaging window provides an indication of the start of the data bearing signal samples. The FFT window 35 of duration T_u corresponding to the period of the data bearing signal samples is therefore determined.

5 Although the synchronisation detector shown in Figure 2 can provide an indication for the FFT window for recovering the data from the COFDM symbol, in some situations for example where the received signal is detected in the presence of multi-path propagation, the sync position from which the FFT window is positioned can be offset if the received signal is detected in the presence of multi-path, which can
10 cause inter-symbol interference between COFDM symbols to the effect that the FFT window includes energy from the guard signal samples from the next COFDM symbol. This causes errors in the detected data. In Figure 3 the COFDM symbols 1, 2 are shown with a second version of the COFDM symbols 1^1 , 2^1 which provide a schematic illustration of multi-path propagation via a first main path 50 and a second
15 echo path 52. A representation of the output of the correlator 10 $c(n)$ due to the echo path 52 and the main path 50 are represented graphically in figure 3 by the lines 54 for the echo signal and for the main signal 56. As detected at the receiver, the correlator output signal will be effectively a combination of the contributions from the main signal 50 and the echo signal 52. The output of the correlator as experienced in the
20 presence of multi path comprising a main and an echo component is represented graphically by a third line 58 which effectively forms the combination of the correlator for the main and echo paths. A result of the first and second moving averaging filters is represented graphically on the fourth and fifth plots 59, 61 of amplitude with respective time for the output of the first adder 18 $a(n)$ and the second adder 30 $e(n)$.

25 As illustrated by the fourth and fifth graphical representations a result of the pre-cursor echo path 52 is to shift the synchronisation point detected by the correlator so that the FFT window is now biased to a point later in time than the ideal position which is illustrated in figure 3 by an arrow 63. In the presence of a low power pre-cursive echo, the window location will be skewed towards the higher energy echo that
30 occurs later. As the separation between the echoes increases, it becomes more likely that the window location derived from the above algorithm will fall outside the guard interval of the low power path and so result in failure to correctly equalise the low

power echo. When this happens, the low power echo becomes the source of ISI thereby degrading the performance of the demodulator.

As shown by the broken line arrow 60 the end of the window now includes signal samples which are influenced by the guard interval for an un-related COFDM symbol for the pre-cursive echo path. As a result the samples from within a region 62 will be affected with inter-symbol interference and therefore will be more likely to cause errors in all carriers after the FFT when the data is recovered from the carriers in the frequency domain.

A receiver for detecting and recovering data from for example a COFDM symbol is shown in Figure 4. The receiver shown in figure 4 is operable to correlate the guard signal samples with the set of received signal samples which provides a representation of the multi-path components, thereby allowing the FFT window positioning decision to be taken on the basis of the time occurrence of significant echoes rather than merely the energy of these echoes. In implementation, a compact architecture is also proposed which results in a lower gate count and improved speed. Furthermore, the synchronisation detector is also used for tracking and time adjustment of the FFT window position as echoes are born, change in energy and/or finally disappear.

In Figure 4 an analogue to digital converter 100 is arranged to receive an intermediate frequency (IF) signal representative of the detected radio signal on which the COFDM symbol has been modulated. The receiver also includes down conversion means and detection means in order to convert the radio frequency signal into an intermediate frequency signal which is fed to the analogue to digital converter 100 via an input 102. Thus it will be appreciated that the receiver may also include radio frequency receiving and down converting means which are not shown in Figure 4. After being analogue to digitally converted the received signal is processed by an intermediate frequency to base band version means 104 before being processed by a re-sampling and carrier offset correction processor 106. The re-sampling and carrier offset correction processor is arranged to track in the frequency domain the K carriers of the COFDM modulation. The base band received signal samples are then fed to a Fast Fourier transform processor 108 which serves to convert the time domain received signal samples into the frequency domain. The data is then recovered from

the frequency domain signal samples by a post FFT processor 110. The data is then fed to a forward error correction processor 112 which operates to decode the error correction encoded data to finally produce the recovered data at an output 114.

5 The receiver according to this example embodiment provides a synchronisation detector which locates the FFT window from which the data bearing signal samples are processed by the FFT processor 108. The FFT window position is adjusted in order that the window includes the maximum energy representative of the data bearing signal samples. To this end an FFT symbol timing recovery processor 116 is arranged to generate a signal indicative of a sync position which is fed to the FFT processor 108
10 via a connecting channel 118. The FFT symbol timing recovery processor 116 is arranged to detect the sync position from the received set of signal samples which represent each COFDM symbol. These are received from the re-sampling and carrier offset correction processor 106 via a connecting channel 120. The operation of the FFT symbol timing recovery processor 116 will now be described with reference to
15 Figure 5 where parts also appearing in Figure 4 bear the same numerical designations.

The symbol time recovery processor shown in Figure 5 is comprised generally of a coarse acquisition processor 200 and a fine acquisition processor 202. The coarse acquisition processor operates generally in accordance with the previously proposed synchronisation detector shown in Figure 2.

20 Coarse Synchronisation Detector

As shown in Figure 5 the coarse acquisition processor comprises a correlator 204 which is arranged to receive the set of received signal samples corresponding to the COFDM symbol via a first input 206. The set of received signal samples are also received via a second input 208 but delayed by a period T_u corresponding to the
25 temporal length of the data bearing signal samples of the COFDM symbol. The correlator 204 is arranged to cross correlate the two signal samples from the received signal as previously explained with reference to the previously proposed detector shown in Figure 2. The correlator then feeds the result of the correlation to a first moving averaging filter 206 which integrates the output of the correlation. This is in
30 turn fed to a second moving averaging filter 208 which integrates the output of the first moving averaging filter. The output of the second moving averaging filter 208 is then

integrated on a symbol by symbol basis by an integration processor 210. The integration processor 210 serves to integrate the output signal from the second moving averaging signal 208 over successive COFDM symbols so that a combined output is produced for these successive symbols. The output of the integrator 210 is then fed to a peak detector 212. The peak detector 212 is arranged to generate a peak value of the symbol integrator. However unlike the previously proposed arrangement shown in figure 2, the length of the integration over $e(n)$ is reduced to only $N_g/4$ to make the energy peak even more biased towards the highest echo as the fine synchronisation detector depends on accurate location of the dominant path. A peak detector 212 then determines the relative displacement which corresponds to the peak of the integrated output signal from the integrator 210 therefore providing a coarse trigger point to the fine synchronisation detector 202.

Fine Synchronisation Detector

The fine synchronisation detector provides an improved estimated of the sync position by utilising a transversal filter which is adaptively matched to the guard interval of successive COFDM symbols. An end of symbol marker is obtained for the dominant multi-path component from the coarse synchronisation detector. This is used to locate the start of the guard interval on each symbol. For symbol m , the received signal either side and including its guard interval, which comprises $3N_g$ of samples, are used to set the taps $f_m(i)$ of the transversal filter. In effect, therefore the received signal is correlated with respect to $3N_g$ worth of samples. This therefore allows for some error in the coarse estimated location of the guard signal samples. Once the filter taps have been set the block $r_m(n)$ of the last N_g samples of the symbol, which were copied to form the guard interval are filtered by the matched filter to produce an output signal. As the filter is excited with these samples, a pulse train $h_m(n)$ representing an approximation to the channel impulse response (CIR) during symbol m is produced at the output since the filter is nominally matched to its excitation. This is represented in equation (3).

$$h_m(n) = \sum_{i=0}^{N_g-1} f_m(n-i)r(n-i) \quad (3)$$

The fine synchronisation detector 202 is also arranged to receive the set of received signal samples and the delayed set of received signal samples from the first and second inputs 206, 208. The received signal samples from the first and second inputs 206, 208 are fed respectively to first and second binary converters 230, 232. The output from the binary converter is fed to a first input of an adaptive matched filter 234. A second input to the adaptive matched filter is fed with samples from the output of the binary converter 232 via a delay line 236 which serves to delay each sample by a period corresponding to the number of samples within the guard period. The output of the adaptive matched filter 234 is received at an integrator 238 forming part of a synchronisation detection processor 235. The integrator 238 serves to integrate the output of the matched filter, the integrated output being presented on first and second outputs 240, 242 to a centre clip processor 244 and a centre clip level calculator 246. As will be explained shortly, the centre clip processor and the centre clip level calculator 244, 246 are arranged to pre-process the output of the adaptive matched filter which has been integrated by the integration processor 238 to the effect of cancelling various peaks of the adaptive filter output which could otherwise give a false indication of the synchronisation point. As such the performance of the synchronisation detector is improved particularly in the presence of noise.

The pre-processed output from the centre clip processor is then fed to a channel impulse response windowing processor 248. The windowing processor 248 provides a further pre-processing operation to the effect of isolating an analysis window within which the pre-processed output of the adaptive filter produces the maximum energy. It is within this analysis window that a peak output of the adaptive matched filter is determined by an error detection processor 250 with respect to the coarse synchronisation estimate provided by the coarse synchronisation detector 200. The operation of the fine synchronisation detector is controlled by a controller 260.

The error detector 250 produces a corrected synchronisation position at an output 252 which is combined with the coarse synchronisation estimate provided at an output 220 by a combiner 254 to produce the start point of the FFT window generated at an output 256. The operation of the fine synchronisation detector and in particular

the operation of the adaptive filter 234 will now be described with reference to Figure 6 where parts also appearing in Figure 5 have the same numerical references.

In Figure 6 a representation of each of the guard signal samples for successive COFDM signals is represented graphically by sections 300 which are arranged to feed a shift register 302. The taps 304 of the shift register are arranged to provide the samples from the guard period. For each successive COFDM symbol, the shift register taps 304 are arranged to represent three guard signal samples worth $3N_g$ of the received signal samples around, and including the guard signal samples for the particular COFDM symbol. As such, the controller 260 within the fine synchronisation detector is arranged in operation to adapt the taps of the matched filter 234 to correspond to the $3N_g$ signal samples of the guard period and surrounding samples for each of the successive COFDM symbol. Therefore, as shown in Figure 6 for the m -th symbol, the matched filter is adapted to have the $3N_g$ signal samples around and including the m -th guard interval. As illustrated by an arrow 306 shown in Figure 6, the received signal samples from which the guard signals samples were formed are fed into and excite the adapted matched filter 234. As a result of the excitation of the matched filter by the received signal sample copied to form the guard signal samples which is indicated by the direction of shift with respect to time 308, an output of the adder 310 when the position of the copy received signal samples coincides with the guard samples is to produce a peak output 320 at the output of the adder 316. As each successive symbol is received, the filter is adapted by replacing its taps with the samples around the guard interval and then waiting for the arrival of the excitation samples. The output of the filter for each symbol is an array of $2N_g+1$ complex numbers. The output arrays from N_{fs} successive symbols as shown in equation (4) are averaged together to filter out noise from the CIR. Then, by computing the absolute value for each averaged impulse, the magnitude of the CIR is derived. As such the output of the matched filter generates effectively the convolution of the guard signal samples with itself which produces effectively a representation of the channel impulse response. By analysing the peaks from the output of the matched filter, an improved synchronisation position can be formed by detecting the earliest of the peaks in order to mitigate the ISI. From this sync position the FFT window can be positioned and from this the data recovered from the COFDM symbol.

$$h(n) = \left| \sum_{m=0}^{N_f} h_m(n) \right| \quad (4)$$

As already explained, coarse acquisition only gives the dominant multi-path component. Components located within $\pm T_g$ seconds of this dominant component can be equalised. Therefore, the transversal filter has to have a length of at least $3N_g$ to
 5 cover both pre-cursive and post-cursive components.

As already explained, the synchronisation detector 250 detects the sync position for the start of the FFT window, from the output of the matched filter. However, in order to improve the probability of correctly detecting the optimal sync position, the fine synchronisation detector 202 is arranged to pre-process the output
 10 signal from the matched filter before the sync position is detected from the pre-processed output signal. The pre-processing is performed by the integrator 238, the centre clip processor 244, the centre clip level calculator 246, and the CIR windowing processor 248. The pre-processing operations performed by each of these processors will now be explained in the following paragraphs.

15 Noise Elimination from Magnitude CIR

The signal-to-noise ratio of the output of the matched filter $h(n)$ can be improved by increasing the number of symbols N_f over which the output of the adaptive matched filter is averaged. The averaging is performed by the integrator 238. This is represented by equation (4). However, a large value for N_f also implies longer
 20 acquisition times (during acquisition) and longer update times (during tracking). The choice of N_f is therefore of necessity, a compromise. This means that the magnitude CIR $h(n)$ is often quite noisy. The noise is reduced by the centre clip processor 244.

The output signal would generally comprise a plurality of temporally separated peaks from which the synchronisation position is detected. However in order to
 25 provide an improved estimate of the sync position particularly for example in the presence of noise, the synchronisation detector may be processed with a centre clip processor 244 operable to pre-process the output signal by identifying the temporal position of the peaks within the output signal which have an amplitude which is less than a predetermined threshold and setting the value of the output signal to a
 30 predetermined default value at the identified temporal positions. Therefore, effectively

any peak having a value which is less than a predetermined threshold is set to a predetermined value, such as zero so that particularly in the presence of noise the sync position can be detected from amongst the largest peak.

Ghost Echo Elimination

5 The output of the matched filter exhibits some peaks which do not represent real echoes, that is to say, echoes produced by propagation paths of the radio channel. This is because the matched filter impulse response and its excitation have both travelled through the same channel and so have each been convolved with the channel impulse response. During the matched filtering process, these channel impulse
10 response components autocorrelate and produce unwanted peaks at the output of the filter. These unwanted peaks are referred to as ghost echoes. Preferably, the ghost echoes should be identified and cancelled in order to improve the likelihood of correctly detecting the optimum synchronisation position. The centre clip processor 244 is also arranged to cancel ghost echoes from the output signal. A further
15 improvement is provided in the detection of the sync position by pre-processing the output signal by locating the relative temporal position of the maximum peak within the output signal, identifying for each other peak sample of the output signal another sample of the output signal at an opposite corresponding temporal displacement with respect to the relative temporal position of the maximum peak, comparing these two
20 samples and replacing the lower of the two samples with zero.

 Embodiments of the present invention can therefore at least in part cancel echoes so that the peak value corresponding to the sync position can be more effectively identified from only the peaks of the output signal which correspond to the actual channel impulse response. This is done using the centre-clipper processor 244 in
25 combination with the centre clip level calculator 246. Significant echoes in $h(n)$ are determined by comparing their magnitude to a pre-determined threshold, the level of which is based on the minimum level of power an un-equalised component or echo needs to have to cause noticeable degradation on the performance of the demodulator. Only echoes that lie above this threshold are retained. All other samples of $h(n)$ are set
30 to a default value such as zero.

Pulses indicating real echoes are often higher in amplitude than their corresponding ghosts. For any real echo located N samples before the main path, a ghost is located N samples after the main echo in the output signal and vice versa. To eliminate ghost echoes, the centre clip processor 244 of the synchronisation detector 235 tests the output signal at equal distances on either side of the main path, retaining the higher amplitude impulse and setting the lower to zero.

Determination of the Channel Impulse Response Length

At the receiver, the maximum length of the channel impulse response of the radio channel which can be resolved corresponds to the guard period. However, the magnitude of the output of the matched filter $h(n)$ according to equation (3) will be of length $2N_g+1$ samples. From this only an analysis period of length N_g+1 that forms the actual channel impulse response is relevant to finding the sync position. This means that only echoes which lie within one guard interval need to be processed. Therefore in order to further improve the estimate of the sync position, in preferred embodiments the synchronisation detector 235 may be provided with a CIR processor 248 operable to pre-process the output signal by generating a representation of the amount of energy of the output signal within a period corresponding to the temporal length of the guard signal samples, for each of a plurality of relative displacements of the guard period with respect to the output signal. The relative displacement of the period having the most energy is then determined, this corresponding to the start of a window of the output signal which contains a representation of the channel impulse response.

In operation, the channel impulse response processor 248 passes the output $h(n)$ of the matched filter through a moving average filter of order N_g+1 to produce an output signal $y(n)$ corresponding to the energy in the signal at the respective displacements according to equation (5):

$$y(n) = \left| \sum_{i=0}^{N_g} h(n+i) \right| \quad \text{for } n = 0, 1, \dots, N_g. \quad (5)$$

where $h(n)$ is the output of the matched filter.

The index I_y for which $y(n)$ is maximum is therefore the start of the window which contains a representation of the impulse response of the channel, the start of the window corresponding to the optimum sync position being sought

Advantageously, the CIR processor 248 may have a second moving average filter, the controller 260 being operable to also excite this second moving average filter with the output samples of the matched filter but in reverse order. The moving average filter is operable to produce a second output signal which is representative of the energy in the reversed matched filter output.

The output of the second moving average filter can be expressed by equation (6), where $z(n)$ is the output of the second moving average filter. As in the first moving average filter, the index I_z for which $z(n)$ is maximum is also identified. The length of the channel impulse response can then be computed as the difference $(I_z + N_g - I_y)$ between the two indices from equations (5) and (6).

$$z(n - N_g) = \left| \sum_{i=0}^{N_g} h(n - i) \right| \quad \text{for } n = 2N_g, 2N_g - 1, \dots, N_g \quad (6)$$

Therefore a further improvement in the probability of correctly recovering the data is provided because the channel impulse response can be more accurately determined within the analysis window set between the start and end positions determined as a result of this pre-processing.

Tracking

During normal operation, new multi-path components might emerge whilst existing ones might change in amplitude. This happens because of movement of objects around the transmitter and/or receiver or across the propagation path etc. In such operation a pre-cursive channel profile might change into a post-cursive profile and vice versa. To maintain performance, in preferred embodiments, the controller 260 the FFT window location is arranged to track these changes in the channel profile. The techniques described above are also used to track changes in channel profile. The location of the dominant multi-path component nominally coincides with the middle tap of the transversal filter. Since the filter has a length of $3N_g$ samples, we can see multi-path components that are located within one guard interval can be identified either side of the dominant path.

The last output sample of the transversal filter occurs nominally at $2N_g$ samples after the start of the dominant path symbol. From the centre of the filter multi-path components can be identified to within $\pm N_g$. Therefore the location of the FFT window can be advanced or retarded by adjusting the FFT window point for the earliest echo. In tracking mode, the complex output from the matched filter is averaged over N_t symbols so as to filter out any noise in the estimates. The ideal FFT window start location is then calculated at T_g seconds later than the start of the optimum CIR. This is compared with the current FFT window start position and adjusted accordingly if the two are different.

Implementation of the Matched Filter

In order to filter the received signal samples with an impulse response corresponding to the guard signal samples, the filter must perform a convolution of complex signal samples of the COFDM symbol. In 2K mode and $\frac{1}{4}$ guard for example, the filter therefore has at least $3 \times 512 = 1536$ taps. Similarly, in 8K mode and $\frac{1}{4}$ guard, the filter has $3 \times 2048 = 6144$ taps. Since each tap is complex and the excitation samples are also complex, such filters could be prohibitively costly in gates and/or processing delay to implement. Preferably, a compact architecture with manageable gate count and/or processing delay should be used. For reasonable performance in the presence of interference most COFDM demodulators adopt at least 10 bits per quadrature sample. This means that for the filter described above, each tap would be represented with two 10-bit numbers for the real and imaginary parts. Since however, only the positions and relative amplitudes of the multi-path components are required to determine the sync position, instead of the absolute amplitude, in preferred embodiments, each quadrature tap can be represented by only the sign of its respective I and Q components. For each tap, this saves, for this example, eighteen bits. Each sample of the received signal is also represented similarly. Therefore, both the dynamic range and bit widths of the

arithmetic used in computing the filter output signal can be now significantly reduced as outlined below.

Instead of representing the I and Q components of the taps and excitation as ± 1 , these values are represented with logic 1 for $+/-1$ and logic 0 for $-/+1$. Then the filter
5 equation becomes:

$$\begin{aligned} h_m(n).I &= \sum_{i=0}^{N_g-1} 2 * \overline{XOR}(f_m(n-i).I, r(n-i).I) - 1 \\ h_m(n).Q &= \sum_{i=0}^{N_g-1} 2 * \overline{XOR}(f_m(n-i).Q, r(n-i).Q) - 1 \end{aligned} \quad (7)$$

where $\overline{XOR}(a, b)$ is the compliment of XOR(a, b). This avoids a requirement
10 to calculate multiplication and, since the accumulator is only summing ± 1 , a more compact arrangement can be made, which can use a slower ripple adder.

Further savings in arithmetic and gates can be achieved by reducing the number of taps over which the filter equation is computed for each output. This can be achieved by either taking only a fraction of the taps e.g. only the middle $N_g/2$ taps or
15 by decimation of the taps, for example, for a decimation by 4, the above equations become:

$$\begin{aligned} h_m(n).I &= \sum_{i=0}^{N_g/4-1} 2 * \overline{XOR}(f_m(n-4i).I, r(n-4i).I) - 1 \\ h_m(n).Q &= \sum_{i=0}^{N_g/4-1} 2 * \overline{XOR}(f_m(n-4i).Q, r(n-4i).Q) - 1 \end{aligned} \quad (8)$$

The decimation factor affects the purity of the filter output. In practice therefore, different optimum decimation factors for each combination of mode and
20 guard interval duration can be chosen.

As will be appreciated, a receiver having a matched filter implementation employing the simplified arrangement for calculating the convolution by logically combining the received signal samples and the filter impulse response may be used to detect a synchronisation position in any received signal having a predetermined
25 characteristic. For the example embodiment described above, this predetermined characteristic is that the samples of the guard period are generated by copying data

conveyed in another part of the received signal samples. However in other embodiments the predetermined characteristic may be any predetermined signal format, so that the impulse response of the filter is not limited to being adapted to the guard signal samples. For example, the filter may be matched to a known data
5 sequence which may be either a pre-amble to the data to be detected or a mid-amble or a post-amble.

Various modifications may be made to the example embodiments herein before described without departing from the scope of the present invention. In particular, it will be appreciated that the synchronisation detector can be applied to any signal in
10 which the guard interval is produced from repeating data bearing signal samples or repeating any other part of the transmitted signal.

CLAIMS

1. A receiver for detecting and recovering data from at least one set of received signal samples, said signal samples comprising a plurality of data bearing signal samples and a plurality of guard signal samples before or after the data bearing signal samples, said guard signal samples being formed by repeating a plurality of said data bearing signal samples, said receiver comprising
- 5 a matched filter having an impulse response,
a controller operable to adapt the impulse response of said matched filter to the
- 10 signal samples of the guard signal samples, said matched filter being operable to produce an output signal which is representative of the convolution of the guard signal samples of said set with said set of received signal samples. and
- a synchronisation detector operable to estimate the location of a sync position, consequent upon the distribution of energy with respect to time of said matched filter
- 15 output signal with respect to said received samples, said sync position providing the position of a window of said received signal samples from which said data may be recovered from said data bearing signal samples.
2. A receiver as claimed in Claim 1, wherein said controller is operable to control
- 20 said matched filter to convolve said received signal samples with said matched filter impulse response starting from a coarse estimate of said sync position providing a temporal location of said guard signal samples, receiver comprising
- a correlator operable
- 25 to correlate two samples from said set of received signal samples separated by a temporal displacement corresponding to the temporal separation of the samples of the guard period and the data bearing signal samples from which the guard signal samples have been formed, said controller being operable to determine said correlation between said two samples at each of a plurality of relatively displaced positions along said received signal samples, and said synchronisation detector is operable
- 30 to determine an output value of said correlator for each of said relatively displaced positions, and

to estimate said coarse sync position estimate in accordance with the displaced position which produces the greatest output value from the correlator.

3. A receiver as claimed in Claim 2, wherein said synchronisation detector is operable to estimate said coarse sync position by determining an amount of energy within a shortened averaging window having a number of samples equal to the number of guard signal samples divided by an integer number, the energy within said shortened averaging window being determined for each output value from said correlator produced for each of said relatively displaced positions falling within said shortened averaging window, said coarse estimate of said sync position being determined in accordance with the relative position of said shortened averaging window having the most energy.
4. A receiver as claimed in Claims 1, 2 or 3, wherein said receiver is operable to process a plurality of said sets of received signal samples, said synchronisation detector being operable to combine said output signal from said synchronisation detector for each of a plurality of sets of received signal samples, and to estimate said sync position from a peak value of said combined output signal.
5. A receiver as claimed in any preceding Claim, wherein said output signal has a plurality of temporally separated peaks, said synchronisation detector being operable to pre-process said output signal by identifying the temporal position of said peaks within said output signal which have an amplitude which is less than a pre-determined threshold, and setting the value of said output signal to a predetermined default value at said identified temporal positions, said sync position being determined from said pre-processed output signal.
6. A receiver as claimed in Claim 5, wherein said default value is zero.
7. A receiver as claimed in any preceding Claim, wherein said synchronisation detector is operable to process said output signal by

generating a representation of the amount of energy in the said output signal within a period corresponding to the temporal length of said guard signal samples, for each of a plurality of relative displacements of said guard period with respect to said output signal, and

5 determining the relative displacement of said period having the most energy, and

identifying the start of an analysis window of said output signal from the temporal position of the beginning of said guard period at said relative displacement of most energy, said sync position being determined from within said analysis window
10 of said processed output signal.

8. A receiver as claimed in Claim 7, wherein said synchronisation detector is operable to determine the end of said analysis window by

reversing said output signal in time,

15 generating a representation of the amount of energy in the said reversed output signal within said guard period, for each of a plurality of relative displacements of said guard period with respect to said reversed output signal,

determining the relative displacement of said period having the most energy, and

20 identifying the end of said analysis window of said output signal from the temporal position of the beginning of said guard period at said relative temporal displacement of most energy.

9. A receiver as claimed in any preceding Claim, wherein said synchronisation
25 detector is operable to pre-process said output signal by

locating the relative temporal position of the maximum peak within said output signal,

identifying for each other peak sample of said output signal another sample of said output signal at an opposite corresponding temporal displacement with respect to
30 said relative temporal position of said maximum peak, comparing these two samples and replacing the lower of the two samples with zero.

10. A receiver as claimed in any preceding Claim, wherein said data is modulated onto said data bearing signal samples in the frequency domain and transformed to said data bearing signal samples into the time domain to form the data bearing signal
5 samples of said set of received signal samples, said receiver further comprising a forward fourier transformer operable to recover the data by performing a forward fourier transform on the signal samples within said window.

11. A receiver as claimed in Claim 10, wherein said data is modulated in
10 accordance with Orthogonal Frequency Division Multiplexing or Coded Orthogonal Frequency Division Multiplexing or the like.

12. A receiver as claimed in any preceding Claim, wherein said set of received signal samples are complex samples having real and imaginary parts, said impulse
15 response having complex samples, and said controller being operable
to represent the real and imaginary components of each of said received signal samples as a positive or negative constant in dependence upon the relative sign of said real and imaginary components, and
to represent the real and imaginary components of the samples of said matched
20 filter impulse response as a positive or negative constant in dependence upon the relative sign of said real and imaginary components, said matched filter being operable to convolve said impulse response with said received signal samples by logically combining the representation of said received signal samples and said impulse response.

25

13. A receiver as claimed in Claim 12, wherein said logical combining of said received signal samples and said impulse response is summing the XOR compliment of the combination of the representation of said received signal samples and said impulse response.

30

14. A receiver as claimed in Claim 13, wherein said matched filter is operable to perform the convolution of said impulse response with said received signal samples in accordance with the following equation:

$$h_m(n).I = \sum_{i=0}^{N_g-1} 2 * \overline{XOR}(f_m(n-i).I, r(n-i).I) - 1$$

$$h_m(n).Q = \sum_{i=0}^{N_g-1} 2 * \overline{XOR}(f_m(n-i).Q, r(n-i).Q) - 1$$

5

where $\overline{XOR}(a, b)$ is the compliment of $XOR(a, b)$, $h_m(n).I$ is the real part and $h_m(n).Q$ the imaginary part of the complex samples of said output signal.

15. A method of detecting and recovering data from at least one set of received
10 signal samples, said set of signal samples comprising a plurality of data bearing signal samples and a plurality of guard signal samples before or after the data bearing signal samples, said guard signal samples being formed by repeating a plurality of said data bearing signal samples, said method comprising

15 adapting the impulse response of a matched filter to the signal samples of the guard signal samples,

producing an output signal which is representative of the convolution of the guard signal samples of said set with said received signal samples, and

20 estimating the location of a sync position, consequent upon the distribution of energy with respect to time of said matched filter output signal with respect to a relative convolution position in said received samples, said sync position providing the position of a window of said received signal samples from which said data may be recovered from said data bearing signal samples.

16. A method as claimed in Claim 15, comprising
25 controlling said matched filter to convolve said received signal samples with said matched filter starting from a coarse estimate of said sync position,

correlating two samples from said set of received signal samples, separated by a temporal displacement corresponding to the temporal separation of the samples of the guard period and the data bearing signal samples from which the guard signal

samples have been formed, at each of a plurality of relatively displaced positions along said received signal samples, ,

determining an output value of said correlator for each of said relatively displaced positions, and

5 generating said coarse estimate of said sync position in accordance with the displaced position which produces the greatest output from the correlator.

17. A method as claimed in Claim 16, wherein said generating said coarse estimate of said sync position comprises

10 - determining an amount of energy within a shortened averaging window having a number of samples equal to the number of guard signal samples divided by an integer number, the energy within said shortened averaging window being determined for each output value from said correlator produced for each of said relatively displaced positions falling within said shortened averaging window, and

15 - determining said coarse estimate of said sync position in accordance with the relative position of said shortened averaging window having the most energy

18. A method as claimed in Claims 15, 16 or 17, comprising

processing a plurality of said sets of received signal samples,

20 combining said output signal produced for each of a plurality of sets of received signal samples, and

estimating said sync position from a peak value of said combined output signal.

19. A method as claimed in any preceding Claim, wherein said output signal has a plurality of temporally separated peaks, said method comprising

25 identifying the temporal position of said peaks within said output signal which have an amplitude which is less than a pre-determined threshold,

30 setting the value of said output signal to a predetermined default value at said identified temporal positions, said sync position being determined from said pre-processed output signal.

20. A method as claimed in Claim 19, wherein said default value is zero.

21. A method as claimed in any of Claims 15 to 20, comprising
generating a representation of the amount of energy of said output signal
within a period corresponding to the temporal length of said guard signal samples, for
5 each of a plurality of relative displacements of said guard period with respect to said
output signal,
determining the relative displacement of said period having the most energy,
and
identifying an analysis window of said output signal, said analysis window
10 starting from the temporal position of the beginning of said guard period at said
relative displacement of most energy, said sync position being determined from within
said analysis window of said output signal.
22. A method as claimed in Claim 21, comprising
15 reversing said output signal in time,
generating a representation of the amount of energy of said reversed output
signal within said guard period, for each of a plurality of relative displacements of said
guard period with respect to said reversed output signal,
determining the relative displacement of said period having the most energy,
20 and
identifying the end of said analysis window of said output signal from the
temporal position in said reversed output signal corresponding to the start of said guard
period at said determined relative displacement of most energy.
23. A method as claimed in any of Claims 15 to 22, comprising
25 locating the relative temporal position of the maximum peak within said
output signal,
identifying for each other peak of said output signal the value of said output
signal at an opposite corresponding temporal displacement with respect to said relative
30 temporal position of said maximum peak, and
if said output signal value at said corresponding displacement is less than said
peak value, setting said output signal value to zero.

24. A method as claimed in any Claims 15 to 23, wherein said data is modulated onto said data bearing signal samples in the frequency domain and transformed to said data bearing signal samples into the time domain to form the data bearing signal samples of said set of received signal samples, said method comprising
5 performing a forward fourier transform on the signal samples within said window.

25. A method as claimed in any of Claims 15 to 24, wherein said set of received
10 signal samples are complex samples having real and imaginary parts, said impulse response having complex samples, said method comprising
representing the real and imaginary components of each of said received signal samples as a positive or negative constant in dependence upon the relative sign of said real and imaginary components, and
15 representing the real and imaginary components of each of the samples of said matched filter impulse response as a positive or negative constant in dependence upon the relative sign of said real and imaginary components, said matched filter being operable to convolve said impulse response with said received signal samples by logically combining the representation of said received signal samples and said
20 impulse response.

26. A computer program providing computer executable instructions, which when
25 loaded onto a computer configures the computer to operate as a receiver as claimed in any of Claims 1 to 14 .

27. A computer program providing computer executable instructions, which when loaded on to a computer causes the computer to perform the method according to
30 Claims 15 to 25.

28. A computer program product having a computer readable medium recorded thereon information signals representative of the computer program claimed in Claims 27 or 28.
- 5 29. A receiver as herein before described with reference to the accompanying drawings.
30. A method of detecting and recovering data substantially as herein before described with reference to the accompanying drawings.

ABSTRACTRECEIVER

A receiver is operable to detect and recover data from at least one set of received signal samples. The signal samples comprise a plurality of data bearing
5 signal samples and a plurality of guard signal samples before or after the data bearing signal sample, the guard signal samples being formed by repeating a plurality of the data bearing signal samples. The receiver comprises a matched filter having a matched impulse response, a controller operable to adapt the impulse response of the matched filter to the signal samples of the guard signal samples, the matched filter
10 being operable to produce an output signal which is representative of the convolution of the guard signal samples of the set with the received signal samples, and a synchronisation detector operable to estimate the location of a sync position, consequent upon the distribution of energy with respect to time of the matched filter output signal with respect to the received samples, the sync position providing the
15 position of a window of the received signal samples from which the data may be recovered from the data bearing signal samples. The receiver can provide an improvement in the detection of the data bearing signal samples within the set of signal samples, by providing a more reliable estimate of the synchronisation position. The receiver can be used for recovering data from signals modulated in accordance
20 with Orthogonal Frequency Division Multiplexing (OFDM) and finds application as a receiver for Digital Video Broadcast (DVB) signals.

[Figure 5]

THIS PAGE BLANK (USPTO)

1

2


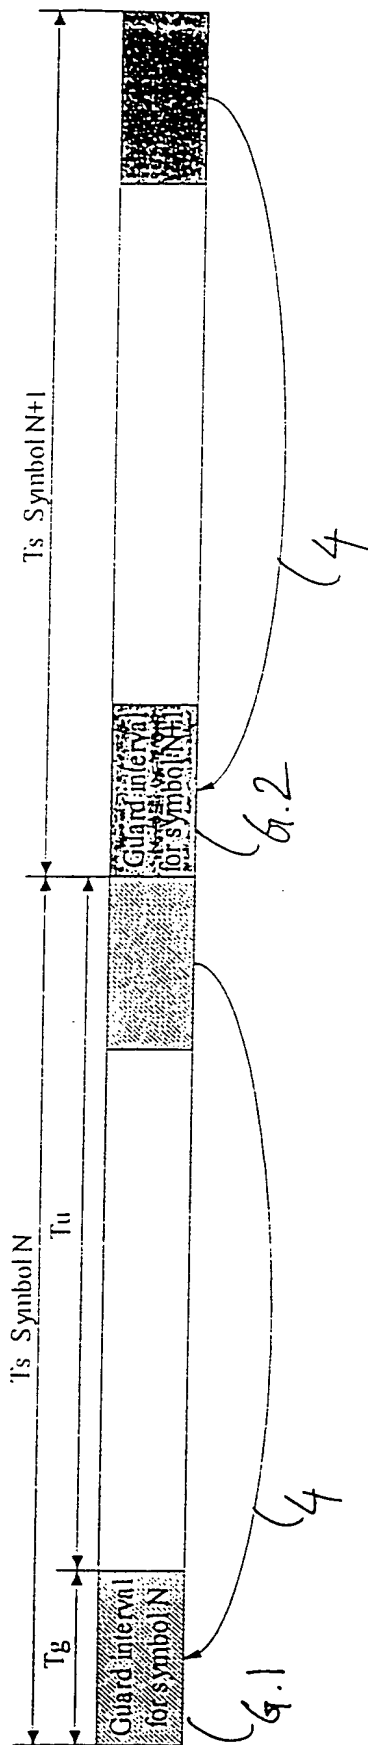


Fig. 1

THIS PAGE BLANK (USPTO)

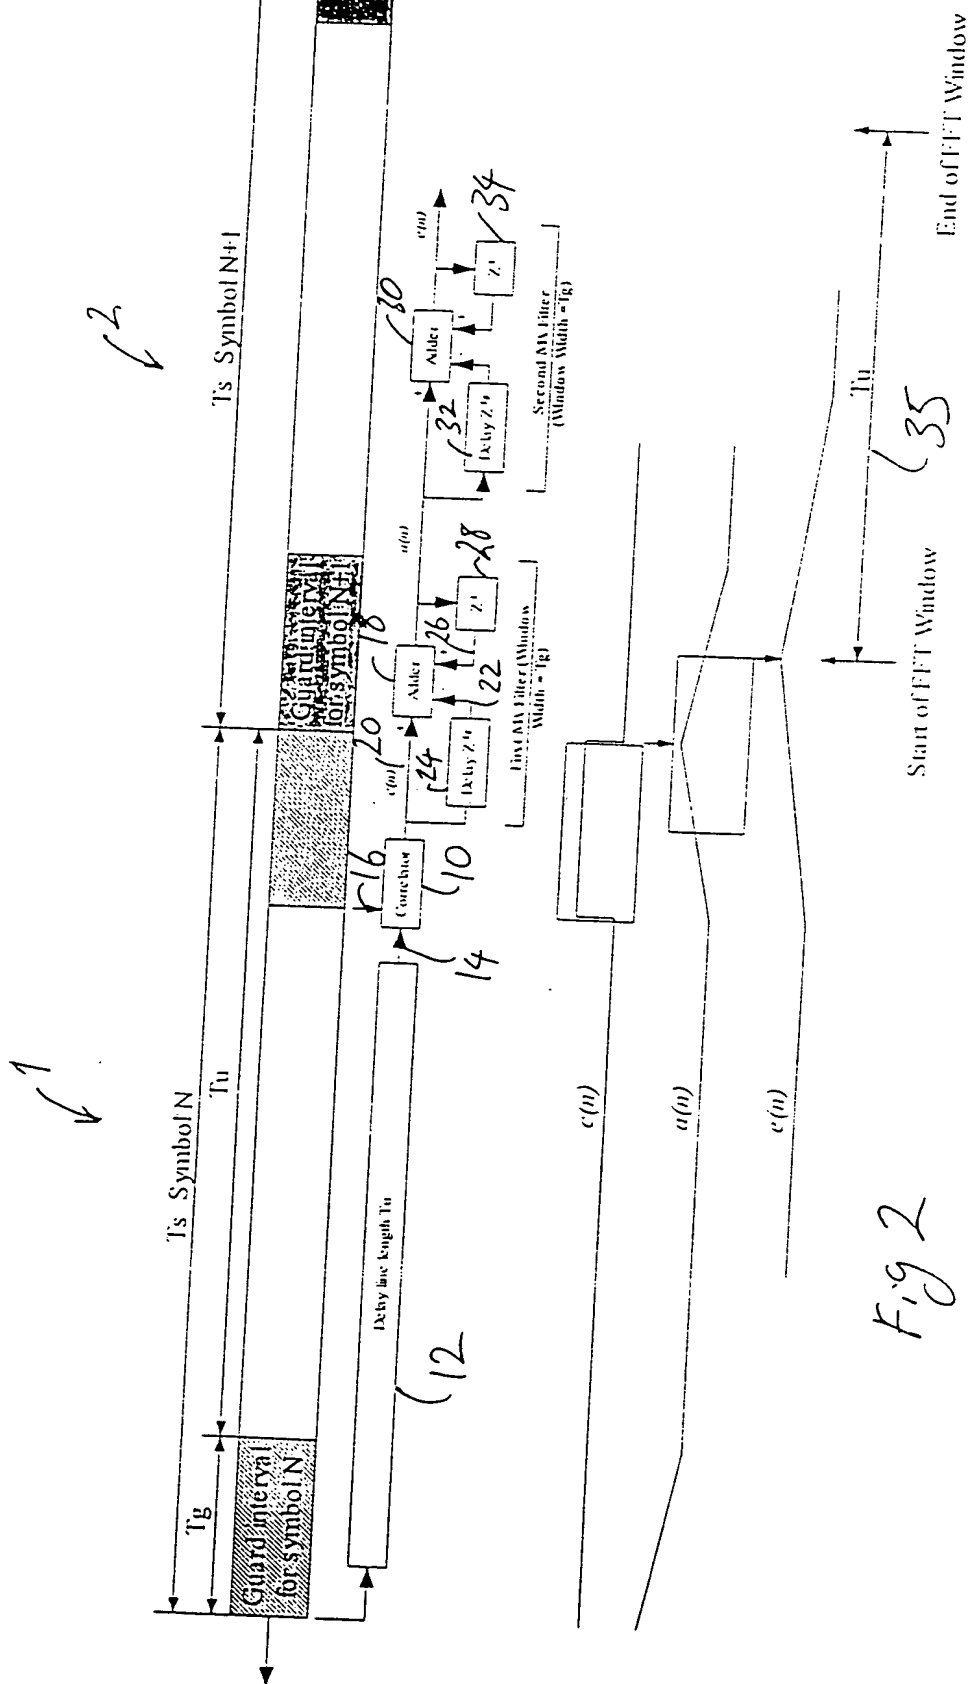

THIS PAGE BLANK (USPTO)

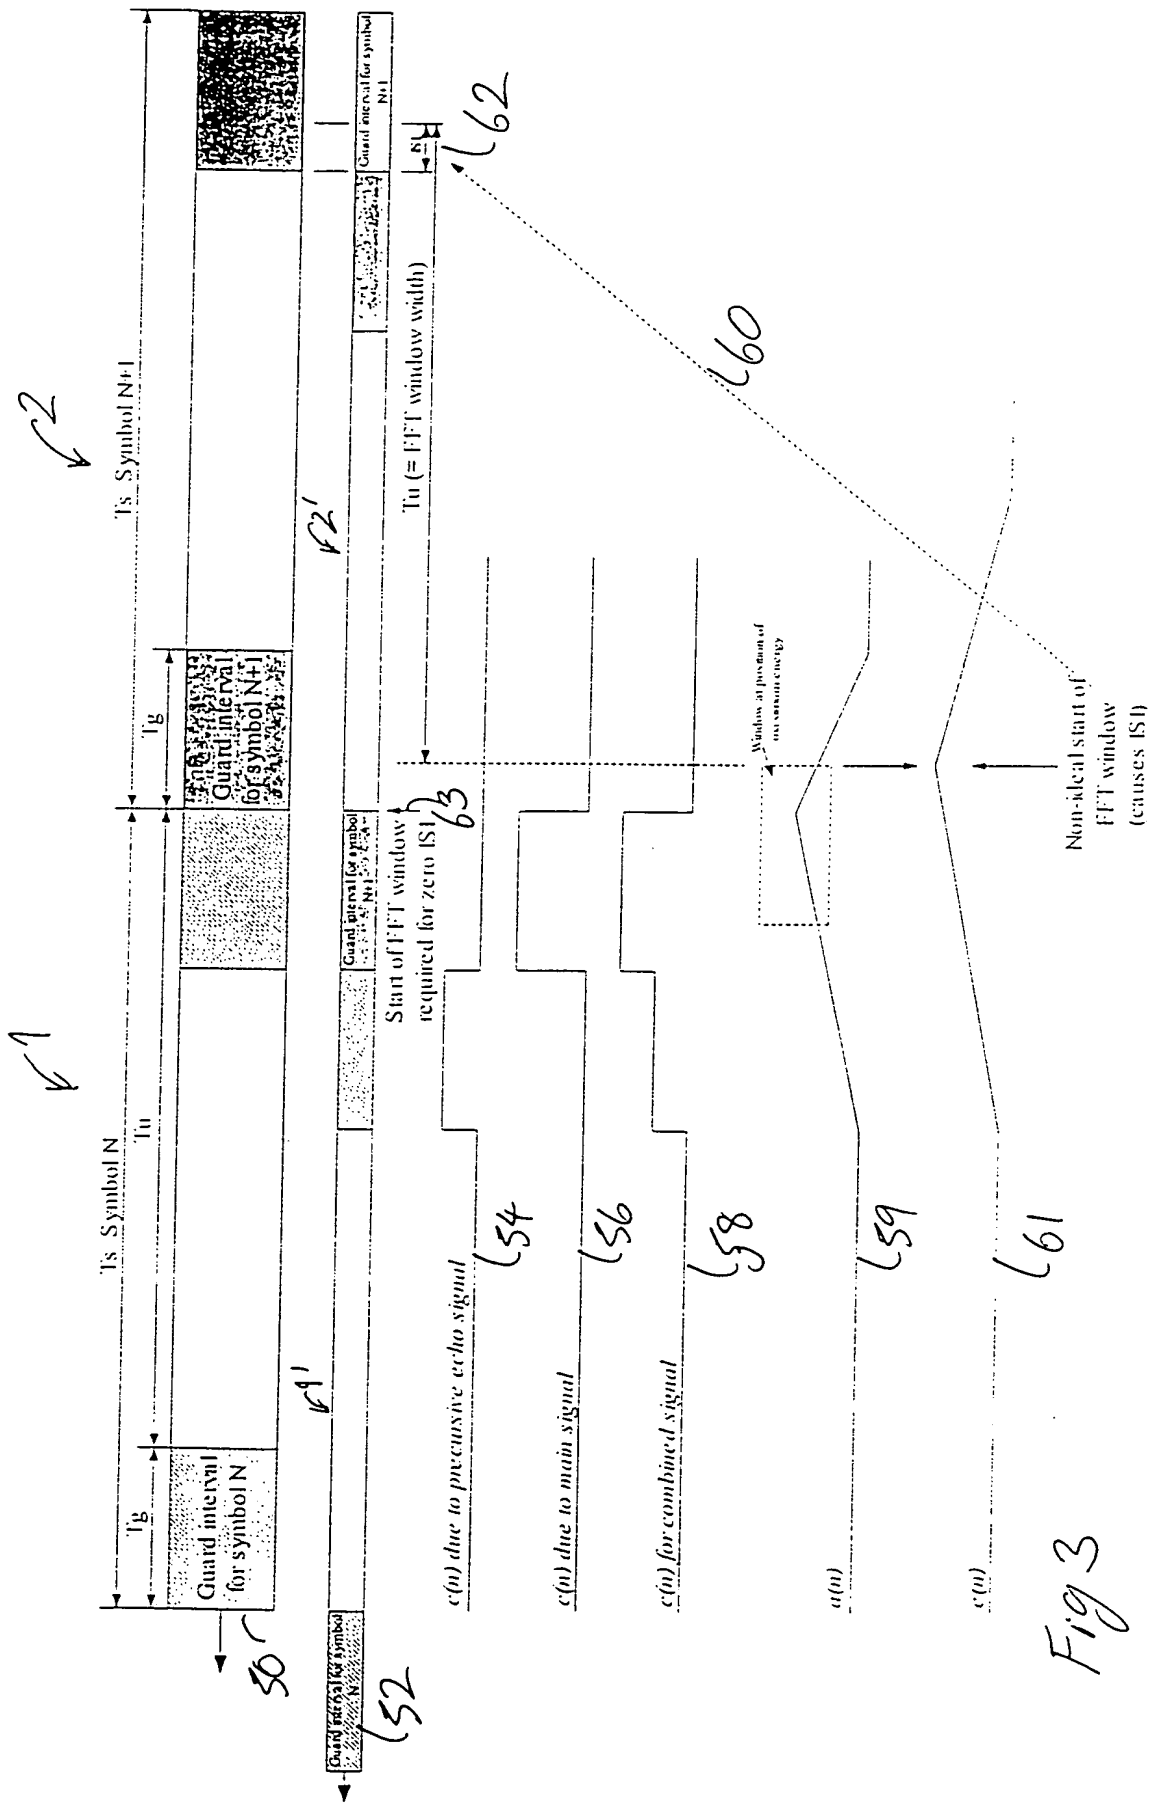


Fig 3

THIS PAGE BLANK (USPTO)


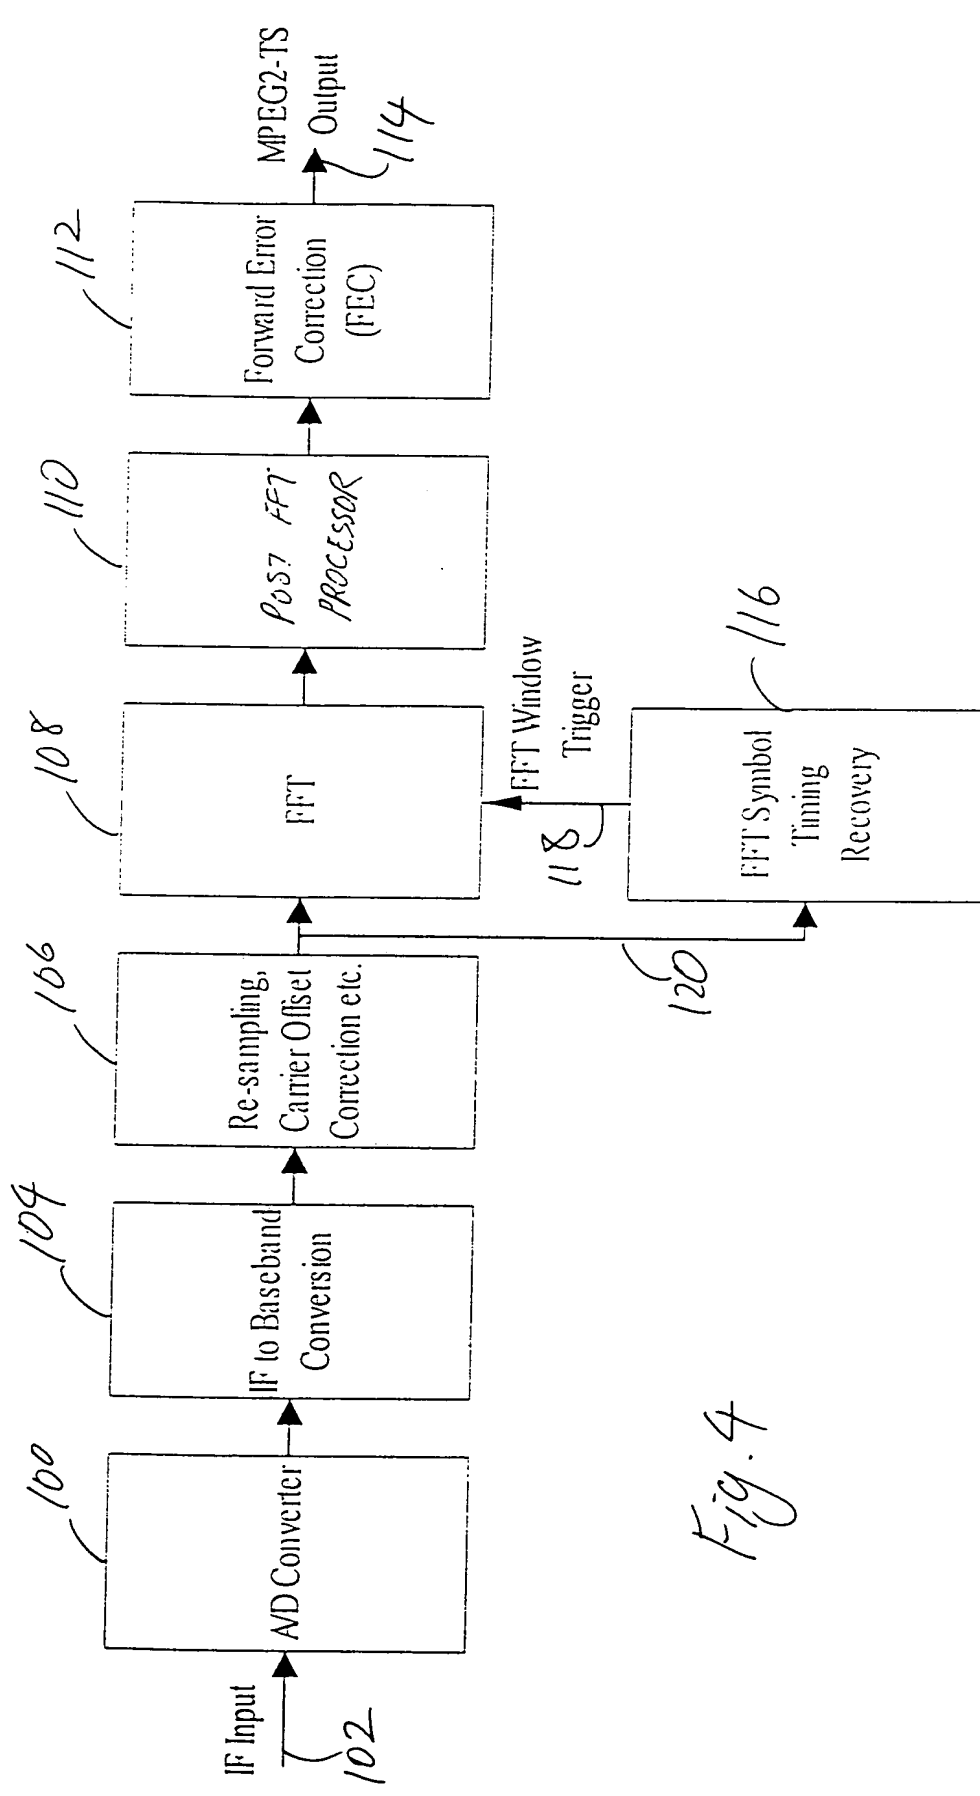


Fig. 4

THIS PAGE BLANK (USPTO)

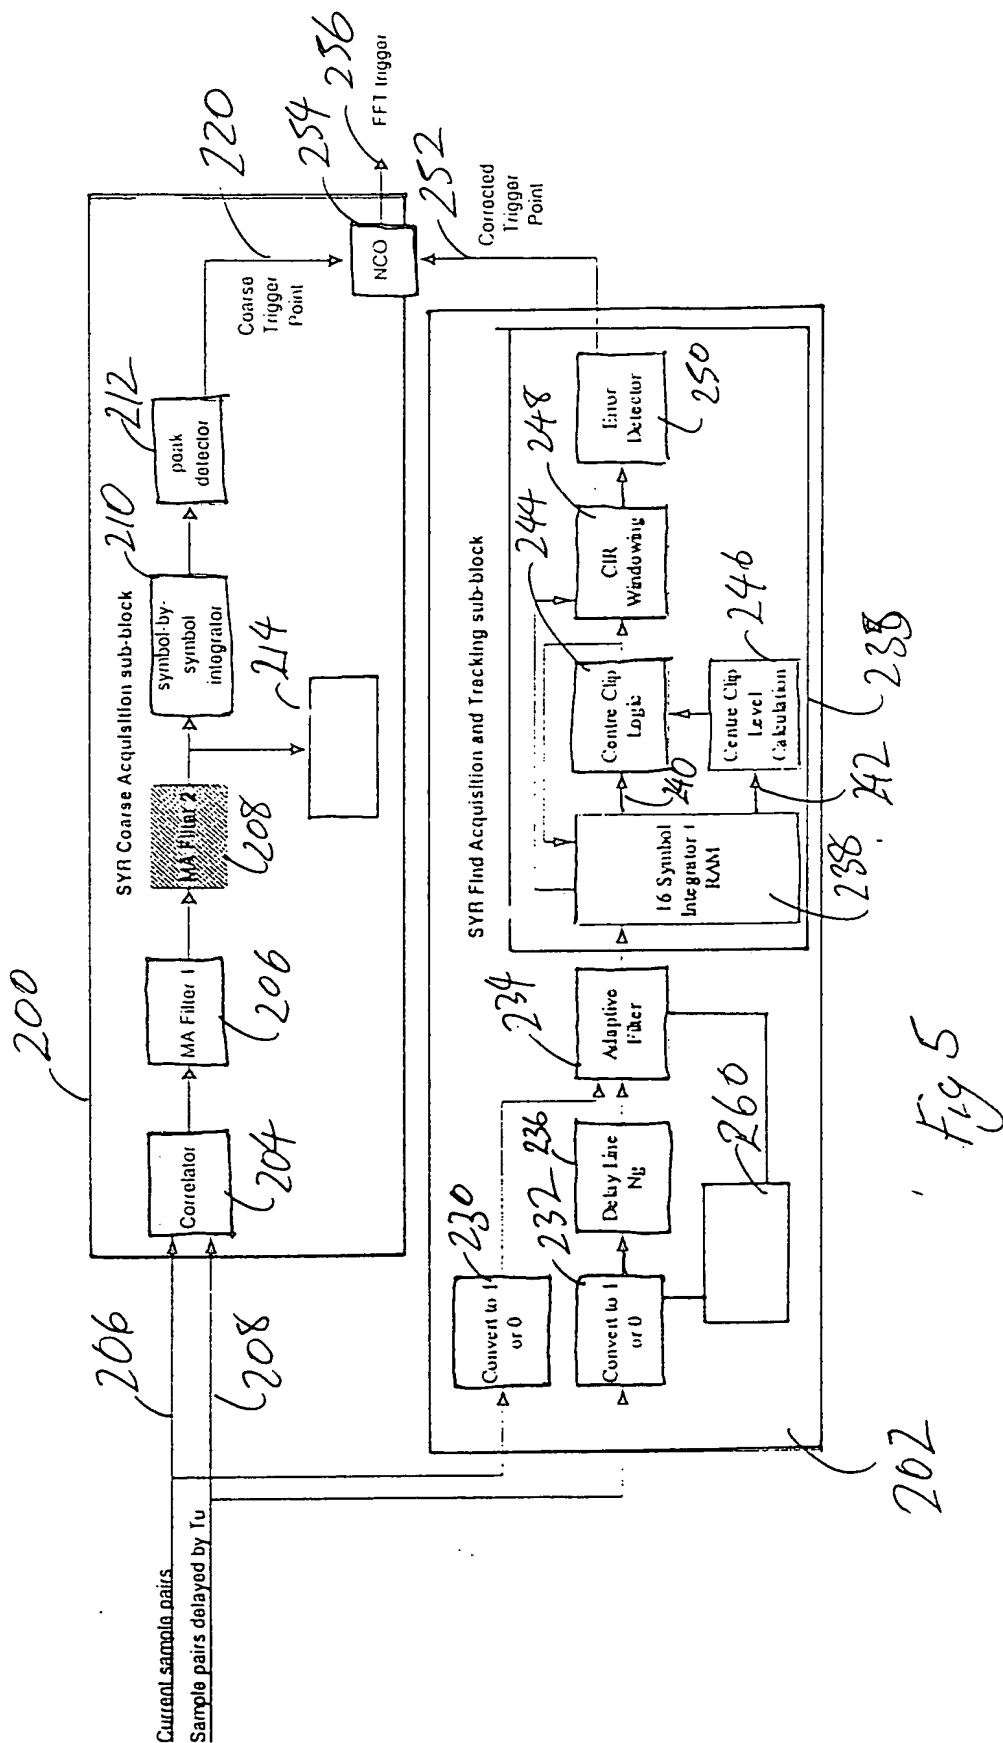

THIS PAGE BLANK (USPTO)

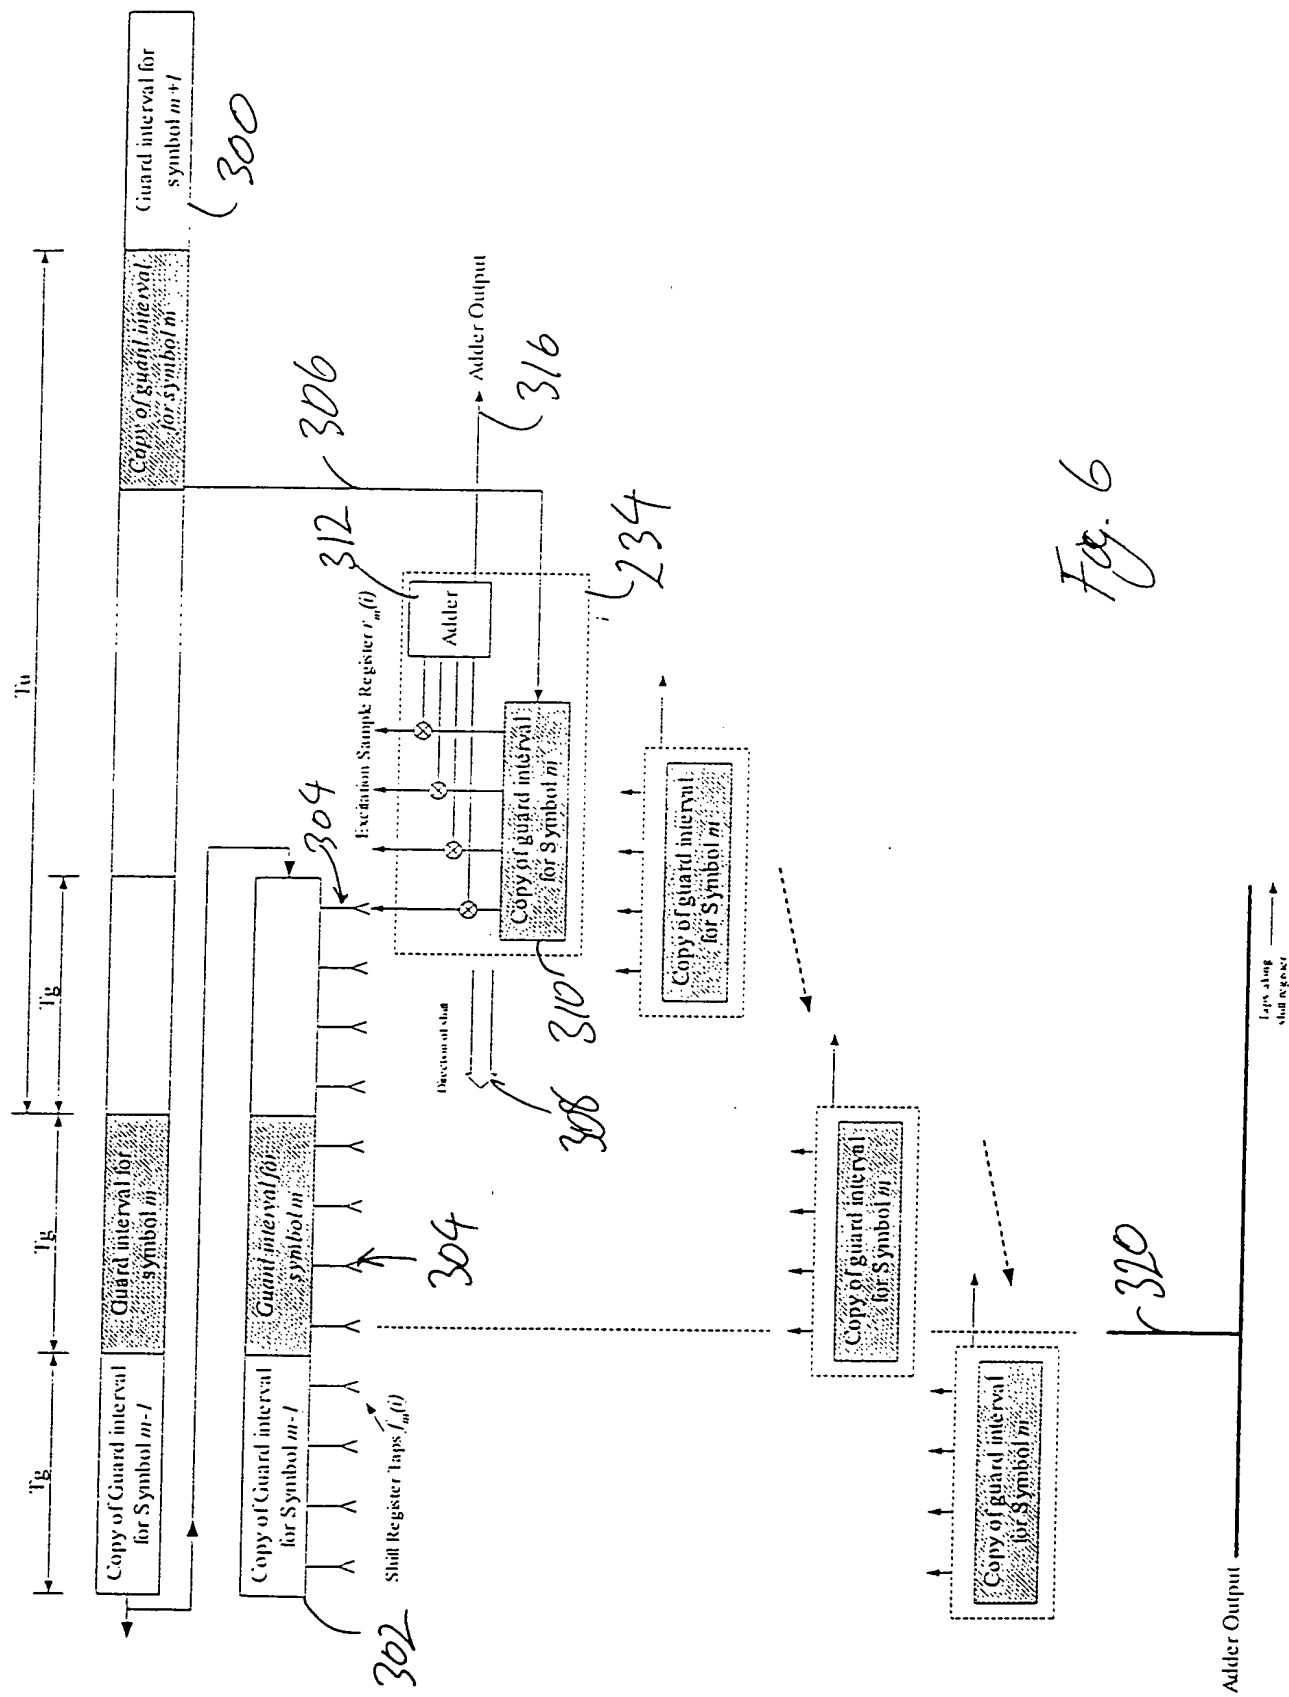


Fig. 6

THIS PAGE BLANK (USPTO)

8/9892

7/7

List of Symbols

T_u	Useful symbol duration in seconds
T_g	Guard interval duration in seconds
T_s	Total symbol duration in seconds
N_u	Number of samples in useful part of symbol
N_g	Number of samples in guard interval of symbol
N_s	Number of samples in whole symbol
N_{fs}	Number of symbols averaged for fine symbol acquisition
N_t	Number of symbols averaged for symbol tracking

Fig 7

THIS PAGE BLANK (USPTO)